

# T-PAK 750

HIGH SPEED BAG SEALING SYSTEM



The T-Pak 750 is an angled bed conveyor combined with a supersealer and optional T-Pak infeed, SST Trimmer and Trim Remove. This system is used in combination with automatic baggers or multi operators on one line. It comes in painted or stainless steel and washdown configurations.





### TECHNICAL SPECIFICATIONS T-PAK 750:

Bag size range:	All bag sizes.
Bag material range:	Heat sealable materials up to 40 mils (1000 microns).
Speed:	Up to 120 (36.5 meters/min.) fpm belt speed.
Seal width:	1/4" (6mm) to 1/2" (12mm) plain or textured.
Machine handing:	Right to left or left to right.
Electric:	110 VAC, 1 Ph, 60 Hz, 10 Amp or to requirement x 2 outlets. 220 VAC, 1 Ph, 50 Hz, 10 Amp.
Pneumatic:	80 - 100 psi when optional trim remover used.


### FEATURES

### BENEFITS

Supersealer bag sealer.	Superior performance for many years.
High speed.	One system meets needs of one or many operators or high speed automatic bagger.
Minimal power requirement.	Low utility consumption. Meets needs for green.
Custom systems.	Systems to meet your application requirements.

### T-PAK 750 OPTIONS:

- Bag top trimmers and trim removers.
- T-Pak in-feed.
- Ink jet printers.
- Automatic bag loaders.
- Product detect in seal area.

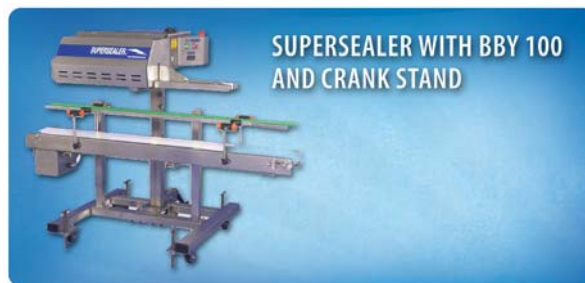

### Our Supersealers seal bags for a variety of industries:

Fruits, nuts, vegetables, meats, poultry, seafood, animal feed, dog & cat foods, bakery goods, snack foods, candy, spices, coffee, tea, chemicals, agricultural products, textiles, general goods.

